




Jack Screws & Board Locks (06)

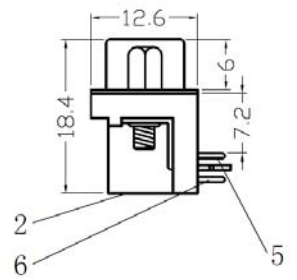

**SPECIFICATIONS**  
 Current rating: 5 amps  
 Contact material: Phosphor Bronze  
 Contact resistance: 30 milliohms max.  
 Housing: PBT Glass Fiber, UL94V-0  
 Insulation resistance: 1,000 megohms max.  
 Withstanding: 1000VAC for 1 min.  
 Temperature range: -55°C to +105°C

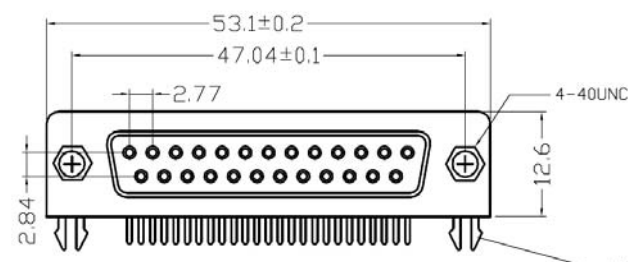

Threaded Inserts, JackScrews & Board locks (08)

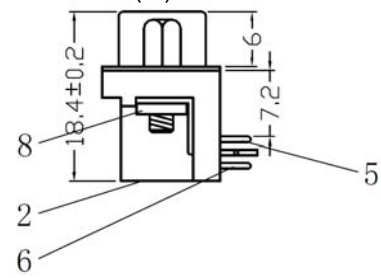

| Item | Description        |
|------|--------------------|
| 1    | Housing            |
| 2    | Housing Rear Cover |
| 3    | Iron Shell         |
| 4    | DR Screw           |
| 5    | Terminal (short)   |
| 6    | Terminal (long)    |
| 7    | Board Locks        |
| 8    | Rivet              |

| Series         | Type                         | Footprint                    | Shell Plating                     | Mounting   | Options  |
|----------------|------------------------------|------------------------------|-----------------------------------|--|--|
| DSXX           | KX                           | X                            | XX                                | XX   | XX   |
| XX=09,15,25,37 | KM=Male R/A<br>KF=Female R/A | A=.283"<br>D=.370"<br>G=.545 | TN = Tin<br>YC=Yellow<br>chromate | 06=Jack Screws & Board Locks<br>07=Threaded Inserts & Board Locks<br>08=Threaded Inserts, JackScrews & Board locks | [blank]=Blue Insulator<br>BK=Black Insulator<br>WT=White Insulator |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing    | Name        | Date        |
|------|-------------|------|----------|------------|-------------|-------------|
|      |             |      |          | Approved   | Howard      | 08/10/99    |
|      |             |      |          | Checked    | Lizzy       | 08/10/99    |
|      |             |      |          | Drawn      | Tina        | 08/10/99    |
|      |             |      |          | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
|      |             |      |          | UNIT: mm   |             |             |

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXX-KX-X-XX-XX-XX**  
 Description: D-subminiature connector, right-angle, male, machined-pin