
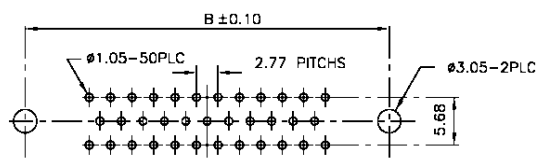


SPECIFICATIONS

Current rating: 5 amps
 Contact material: Brass, machined pin
 Contact plating: Gold flash
 Contact resistance: 15 milliohms max.
 Insulator material: PBT + glass fiber, UL94V-0
 Insulator resistance: 1,000 megohms min.
 Shell material: Steel
 Shell plating: Tin or zinc
 Jack screw material: Brass
 Jack screw plating: Nickel
 Board lock material: Brass
 Board lock plating: Tin or nickel
 Withstanding: 500VAC for 1 min
 Operating temperature: -50°C to +105°C

PCB LAYOUT

Dimensions			
Pos.	A	B	C
9	30.80	24.99	16.30
15	39.15	33.32	24.65
25	53.00	47.04	38.40
37	69.30	63.50	54.80
50	67.00	61.00	52.20

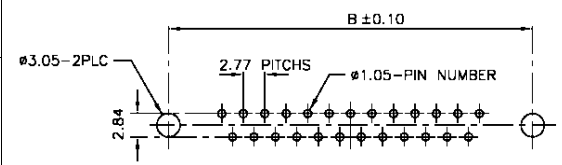

Series	Type	Footprint	Mounting	Options
DSXX	MFT	A	XXX	XX
09, 15, 25, 37, 50	MFT=Female MMT=Male	A=Standard tail for .062" to .125" PCB	[blank]=.120" thru hole RSB=#4-40 riveted stand off, board locks RCN=#4-40 riveted clinch nut RJS=#4-40 riveted jackscrew	30GD=30µ" gold flash BK=Black insulator

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'
 UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXX-MFT-A-RSB-XX**

Description: Machined contact D-sub, female, straight PCB mount