

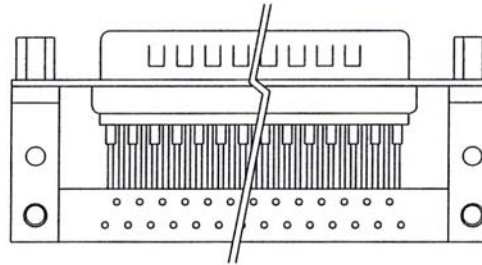


**SPECIFICATIONS**

Current rating: 5 amps  
 Voltage rating: 500VAC for 1 minute  
 Contact material: Brass, machined pin  
 Contact plating: Gold flash over nickel  
 Contact resistance: 15 milliohms max.  
 Insulator material: PBT with fiberglass, UL94V-0  
 Insulator resistance: 1,000 megohms min.  
 Shell material: Steel  
 Shell plating: Tin  
 Bracket material: PBT with fiberglass, UL94V-0  
 Boardlock material: Copper alloy or steel  
 Boardlock plating: Tin  
 Temperature range: -50°C to +100°C

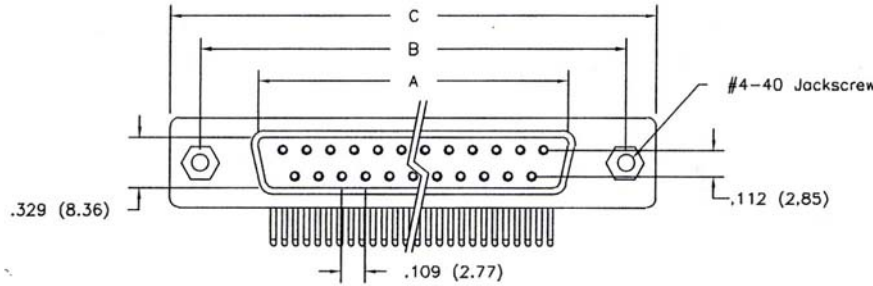

.545" Footprint with Body Bracket Shown

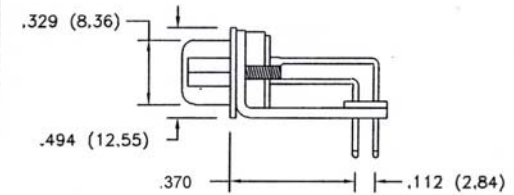

Dimensions mm			
Contacts	A	B	C
9	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32
50	52.81	61.11	66.93

Series	Type	Footprint	Shell Plating	Mounting	Bracket	Options
DSXX	FM	X	XX	03	X	XX
D-sub connector XX=Pins 9, 15, 25, 37,50	MM=Male r/a FM=Female r/a MMT=Male straight FMT=Female straight	A=.283" D=.370"	TN = Tin YC=Yellow chromate	01=4-40 Threaded jackscrews 02=.118 Through Hole 03=Riveted Clinch Nut 04=Clinch Nut and Jackscrew	Blank=None M=Metal bracket MBL=Metal bracket with board locl P=Plastic Bracket (d only)	[blank]=None BK=Black insulator 30GD=30µ" gold

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXX-MM-D-X-01-M-XX**

Description: D-subminiature connector, right angle, machined pin, female