


SPECIFICATIONS

Current rating: 5 amps
 Contact material: Brass, machined pin
 Contact plating: Gold flash
 Contact resistance: 15 milliohms max.
 Insulator material: PBT + glass fiber, UL94V-0
 Insulator resistance: 1000 megohms min.
 Shell material: Steel
 Shell plating: Tin or zinc
 Jack screw material: Brass
 Jack screw plating: Nickel
 Board lock material: Brass
 Board lock plating: Tin or nickel
 Withstanding: 500VAC for 1 min
 Operating temperature: -50°C to +105°C

PCB LAYOUT

Dimensions			
Pos.	A	B	C
9	30.80	24.99	16.92
15	39.15	33.32	25.25
25	53.00	47.04	38.96
37	69.30	63.50	55.42
50	67.00	61.00	52.80

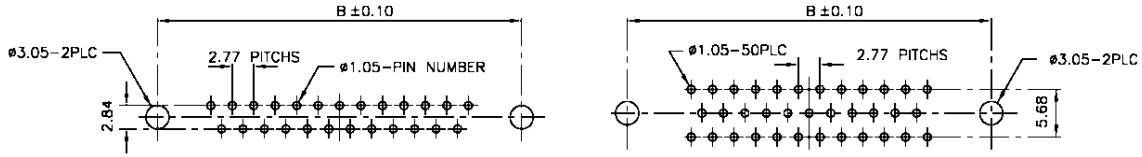

Series	Type	Footprint	Mounting	Options
DSXX	MMT	A	XXX	XX
09, 15, 25, 37, 50	FFT=Female MMT=Male	A=Standard tail for .062" to .125" PCB	Blank=.120" thru hole RSB=4-40 riveted stand off, board locks RCN=4-40 riveted clinch nut RJS=4-40 riveted jackscrew	30GD=30µ" gold flash BK=Black insulator

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXX-MMT-A-RSB-XX**

Description: Machined contact D-sub, male, straight PCB mount