


PC Board Layout

**SPECIFICATIONS**

- Current rating: 5 amps
- Contact material: Brass, stamped pin
- Contact plating: Gold flash or gold
- Contact resistance: 15 milliohms max.
- Insulator material: PBT + glass fiber, UL94-V0
- Board lock material: Brass
- Board lock plating: Tin or nickel
- Shell material: Steel
- Shell plating: Tin or zinc
- Jackscrew material: Brass, 4.75x5.0x10
- Jackscrew plating: Nickel
- Withstanding: 500VAC for 1 min.
- Operating temperature: -50°C to +105°C

Dimensions			
Pos.	A	B	C
09	30.80	24.99	16.30
15	39.15	33.32	24.65
25	53.00	47.04	38.40
37	69.30	63.50	54.80
50	67.00	61.00	52.80

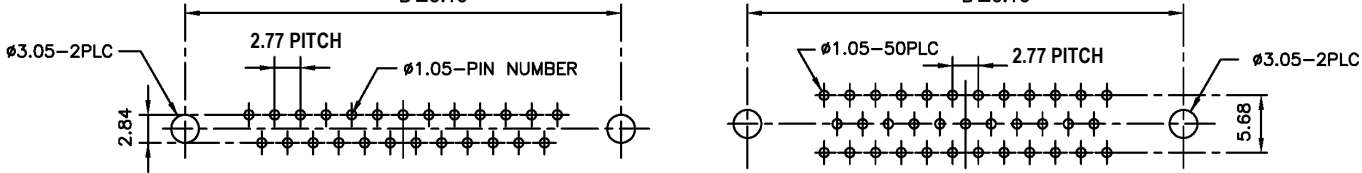

Series	Type	Tail options	Face options	Other options
DSXX	XX	X	XXX	XX
D-sub connector XX=Pins 9, 15, 25, 37, 50	FT=Female vertical mount MT=Male vertical mount MHT=Male high profile FHT=Female high profile	A=Standard for .052" to .125" PCB B=Wire wrap	[blank]=.120" thru hole RCN=Clinch nut RJS=Jackscrew RSB=Standoff with board locks	[blank]=None FF=Ferrite filter YC=Yellow chromate shell

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/14/03
				Checked	Lizzy	04/14/03
				Drawn	Tina	04/14/03
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXX-MT-A-RJS-RSB**  
 Description: D-subminiature connector, PCB straight type, stamped pin, male, boardlocks, lock screw