


- SPECIFICATIONS**
- Current Rating: 5A
 - Test Voltage: 1200 V/mm
 - Number of Contacts: 9, 15, 25
 - Contact Material: Brass Gold Plated
 - Contact Resistance: 10mΩ max
 - Shell Material: Copper Nickel Plated
 - Insulation Resistance: 1000MΩ min
 - Application Cable Dia.: 6.0~10mm
 - Protection Grade: IP67
 - Solder Cup: Max. 20 AWG
 - Back Shell: ABS
 - Screw: 4-40 UNC
 - Seal Ring: FKM70A
 - Temperature Range: -25°C to +70°C

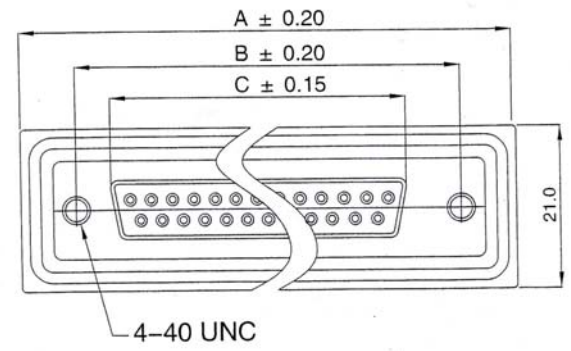

Dimensions			
Pins	A	B	C
9	39.4	25.0	16.33
15	47.8	33.5	24.66
25	64.5	47.04	38.38

Series	Type
DSXXW	XX
Waterproof D-sub XX=9,15,25 contacts	MT=Male Straight FT=Female Straight

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/04/08
				Checked	Lizzy	12/04/08
				Drawn	Tina	12/04/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXXW-FT**

Description: D-Sub female connector, rear plastic mounting plate, straight PCB type