

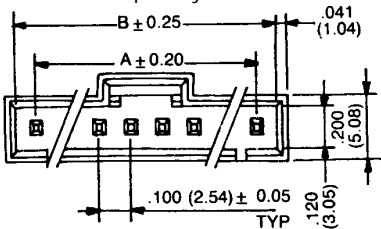

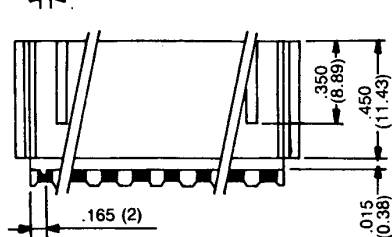



JS-1143 Top Entry

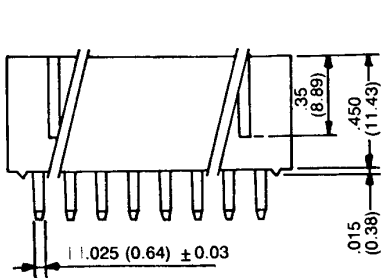

JS-1143R Side Entry

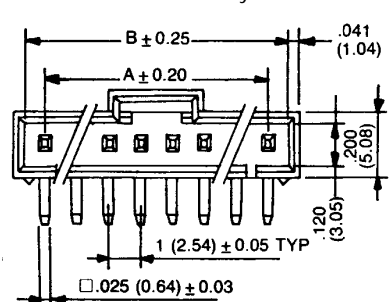

SPECIFICATIONS

- Voltage rating: 250 VAC/VDC
- Current rating: 3 amps AC/DC
- Contact resistance: Initial value 10 milliohms max.; after testing 20milliohms max.
- Insulation material: PBT +15% glass fiber, UL94V-0
- Insulation resistance: 1,000 megohms min.
- Withstanding: 1,000VAC for 1 min.
- Temperature range: -25°C to + 85°C
- Processing Temp.: 230°C +/- 5°C for 5 +/- 0.5 sec
- PC board thickness: .063 (1.6mm)
- Poles: 2-12

Poles	A	B
2	.100 (02.54)	.199 (05.05)
3	.200 (05.08)	.299 (07.59)
4	.300 (07.62)	.399 (10.13)
5	.400 (10.19)	.499 (12.67)
6	.500 (12.70)	.599 (15.21)
7	.600 (15.24)	.699 (17.75)
8	.700 (17.78)	.799 (20.29)
9	.800 (20.32)	.899 (22.83)
10	.900 (22.86)	.999 (25.37)
11	1.000 (25.40)	1.099 (27.91)
12	1.100 (27.94)	1.199 (30.45)

RoHS compliant

Series	Type	Positions	Plating	Options
JS-CH	1143X	XX	XX	XX
Connector	X=Top Entry if Blank R=Side Entry	02-12	Blank=Tin SGXX=Selective Gold GDXX=Gold XX=flash if blank, 15,30u"	Blank=none NL=no latch PP=Polarized pin

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PN, PNT	09/14/10	Greg	Approved	Howard	09/10/98
				Checked	Lizzy	09/10/98
				Drawn	Tina	09/10/98
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-CH-1143X-XX-XX**

Description: Disconnectable locking connector, .100" (2.54mm) pitch