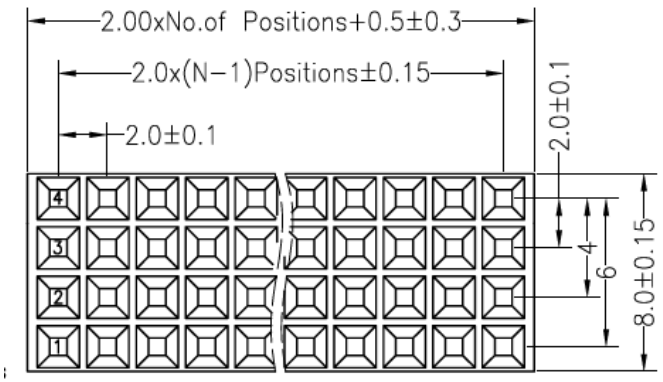

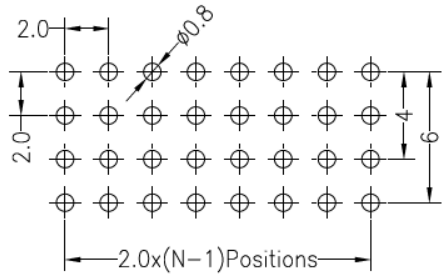

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Current Rating:	1.5A
Contact Material:	Brass
Contact Plating:	Gold Flash, Standard
Contact Resistance:	20 milliohms max
Insulator Material:	LCP
Insulation Resistance:	1000 Megohms min.
Withstanding:	500VAC
Operating Temp:	-45ºC ~ +105ºC

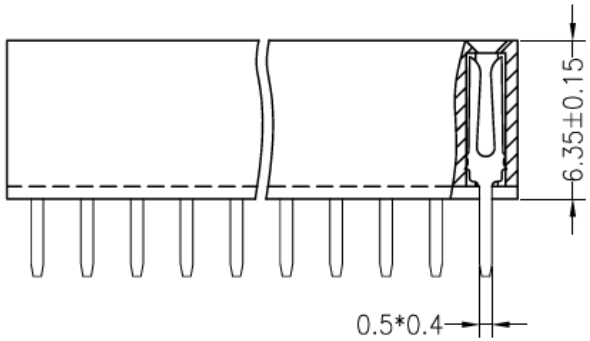



Series	Rows	Profile	Contacts	Tail Length	Plating	Package
BRS	7	XX	XX	A	XX	XX
2mm Receptacle Strip	7=4 Rows Vertical	HP=6.35mm HPE=9.35mm	04-160	A=3.1mm (std)	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank, 10,15,30 u”	BG=Bag TY=Tray TB=Tube BC=Tube w/Cap RC=Reel w/Cap RT=Reel w/Tape

RoHS Compliant

Rev.	Description	Date	Approved

Drawing	Name	Date
Approved	Howard	04/18/12
Checked	Lizzy	04/18/12
Drawn	Tina	04/18/12
0.0 ± 0.35	0.00 ± 0.20	Angles ± 3’
UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-07-HP-XX-A-XX-XX**

Description: Header, female, 2.00mm pitch, quad row, DIP type