
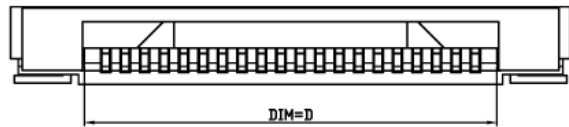
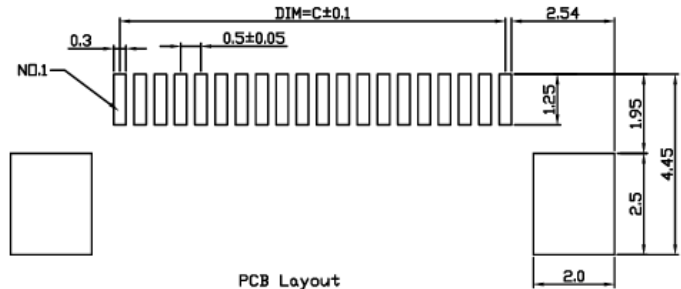



SPECIFICATIONS

Voltage Rating: 50V AC/DC
 Current Rating: 0.4A AC/DC
 Contacts: Phos Bronze
 Contact Resist: 20 milliohm max
 Housing & Actuator: Thermoplastic
 UL 94V-0
 Insulation Resist: 500 milliohm min
 Relative Humidity: 93%+40°C
 Mounting Tabs: Brass Tin Plated
 Withstanding: 200VAC/min.
 Operating Temp: -25°C to +85°C

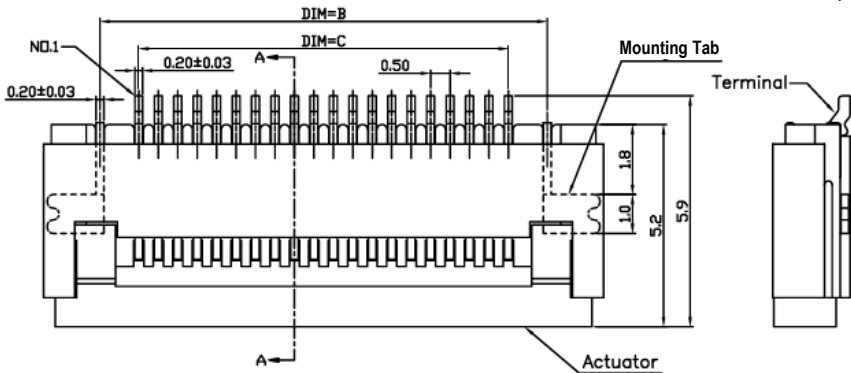

Series	Pitch (mm)	Type	Positions	Style	Plating	Option
CFPC	050	EM1126Z	XX	RBS	XX	XX
FPC/FFC connector (Flat Printed Flat Flex Cable)	050=0.50	See spec Zero insertion force	04-60	RBS=Bottom Contact R/A SMT	TN=Tin GDY=Gold X=Flash blank, 3, 5µ"	TR=Reel TB=Tube

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/02
				Checked	Lizzy	08/10/02
				Drawn	Tina	08/10/02
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFPC-050-EM1126Z-XX-RBS-XX-XX**

Description: FPC/FFC connector, 0.5mm pitch

1 2 3 4 5 6 7 8 9

A

A

DIMENSIONS

Pos.	A	B	C	D	Pos.	A	B	C	D	Pos.	A	B	C	D	Pos.	A	B	C	D
4	6.4	3.5	1.5	2.6	19	13.9	11.0	9.0	10.1	34	21.4	18.5	16.5	17.6	49	28.9	26.0	24.0	25.1
5	6.9	4.0	2.0	3.1	20	14.4	11.5	9.5	10.6	35	21.9	19.0	17.0	18.1	50	29.4	26.5	24.5	25.6
6	7.4	4.5	2.5	3.6	21	14.9	12.0	10.0	11.1	36	22.4	19.5	17.5	18.6	51	29.9	27.0	25.0	26.1
7	7.9	5.0	3.0	4.1	22	15.4	12.5	10.5	11.6	37	22.9	20.0	18.0	19.1	52	30.4	27.5	25.5	26.6
8	8.4	5.5	3.5	4.6	23	15.9	13.0	11.0	12.1	38	23.4	20.5	18.5	19.6	53	30.9	28.0	26.0	27.1
9	8.9	6.0	4.0	5.1	24	16.4	13.5	11.5	12.6	39	23.9	21.0	19.0	20.1	54	31.4	28.5	26.5	27.6
10	9.4	6.5	4.5	5.6	25	16.9	14.0	12.0	13.1	40	24.4	21.5	19.5	20.6	55	31.9	29.0	27.0	28.1
11	9.9	7.0	5.0	6.1	26	17.4	14.5	12.5	13.6	41	24.9	22.0	20.0	21.1	56	32.4	29.5	27.5	28.6
12	10.4	7.5	5.5	6.6	27	17.9	15.0	13.0	14.1	42	25.4	22.5	20.5	21.6	57	32.9	30.0	28.0	29.1
13	10.9	8.0	6.0	7.1	28	18.4	15.5	13.5	14.6	43	25.9	23.0	21.0	22.1	58	33.4	30.5	28.5	29.6
14	11.4	8.5	6.5	7.6	29	18.9	16.0	14.0	15.1	44	26.4	23.5	21.5	22.6	59	33.9	31.0	29.0	30.1
15	11.9	9.0	7.0	8.1	30	19.4	16.5	14.5	15.6	45	26.9	24.0	22.0	23.1	60	34.4	31.5	29.5	30.6
16	12.4	9.5	7.5	8.6	31	19.9	17.0	15.0	16.1	46	27.4	24.5	22.5	23.6					
17	12.9	10.0	8.0	9.1	32	20.4	17.5	15.5	16.6	47	27.9	25.0	23.0	24.1					
18	13.4	10.5	8.5	9.6	33	20.9	18.0	16.0	17.1	48	28.4	25.5	23.5	24.6					

B

B

C

C

D

D


E


E

F

F

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/02
				Checked	Lizzy	08/10/02
				Drawn	Tina	08/10/02
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	



Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFPC-050-EM1126Z-XX-RBS-XX-XX**

Description: FPC/FFC connector, 0.5mm pitch

G

G

1 2 3 4 5 6 7 8 9