


SPECIFICATIONS
 Voltage Rating: 300V
 Current Rating: 7A
 Contact Material: Brass, Tin Plated
 Contact Resistance: 20 milliohm max
 Housing: PA66, UL94V-0
 Insulation Resistance: 5000 megohm min
 Withstanding: 1500VAC/1 min
 Wire Range: 22-18 AWG
 Operating Temp: -40°C to +105°C
 Processing Temp: +250°C/5 sec

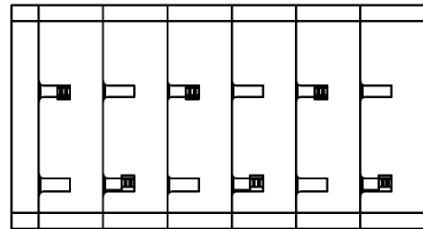

VERSION A

RoHS compliant

Series	Type	Pitch	Positions	Color
CMTB	F250X	XXX	XX	XX
Terminal block	Screwless X: Version A or B See Drawings	250=2.50mm 350=3.50mm	02-25	GY=Gray

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/18/12
				Checked	Lizzy	03/18/12
				Drawn	Tina	03/18/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		



Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-F250X-XXX-XX-GY**

Description: Screwless terminal block

SPECIFICATIONS

Voltage Rating: 300V
 Current Rating: 7A
 Contact Material: Brass, Tin Plated
 Contact Resistance: 20 milliohm max
 Housing: PA66, UL94V-0
 Insulation Resistance: 5000 megohm min
 Withstanding: 1500VAC/1 min
 Wire Range: 22-18 AWG
 Operating Temp: -40°C to +10°C
 Processing Temp: +250°C/5 sec

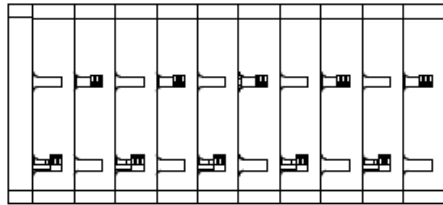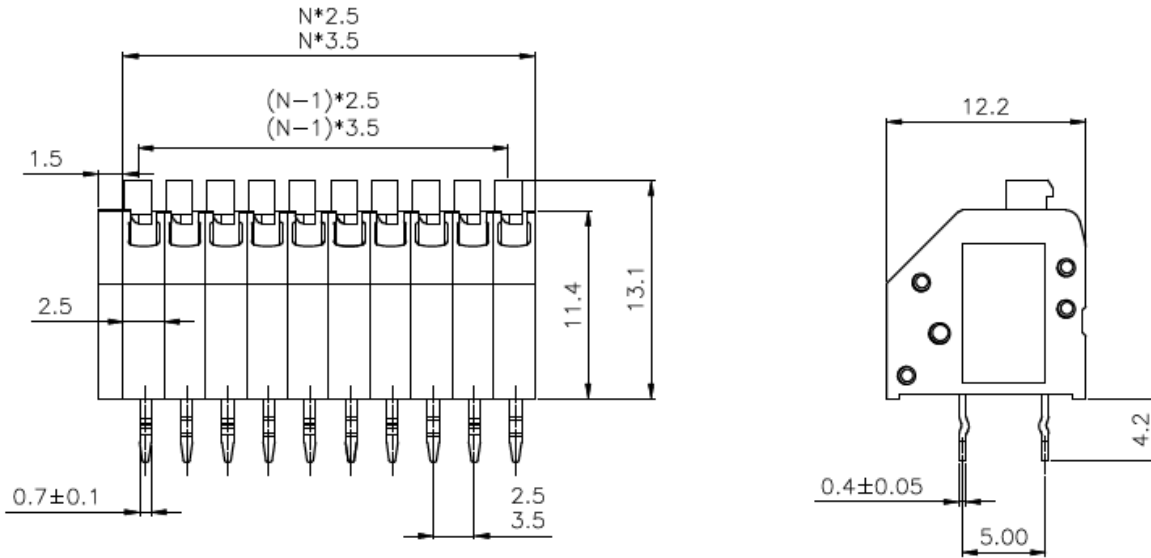

VERSION B

RoHS compliant

Series	Type	Pitch	Positions	Color
CMTB	F250X	XXX	XX	XX
Terminal block	Screwless X: Version A or B See Drawings	250=2.50mm 350=3.50mm	02-25	GY=Gray

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/18/12
				Checked	Lizzy	03/18/12
				Drawn	Tina	03/18/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-F250X-XXX-XX-GY**

Description: Screwless terminal block