


SPECIFICATIONS

Current Rating: 1.5A
 Voltage Rating: 125 VAC RMS
 Housing: Polyester + GF, UL 94V-0, Black
 Contacts: Phos. Bronze, Selective Gold Plated
 Insulation Resistance: 500 Megohms at 500VDC min
 Contact Resistance: 30 milliohms max
 Shield: Copper Alloy, Nickel Plated
 Withstanding: 1000VAC RMS/1 min
 Durability: 750 Cycles min
 Operating Temp: 0°C to 70°C
 Storage Temp: -40°C to +85°C

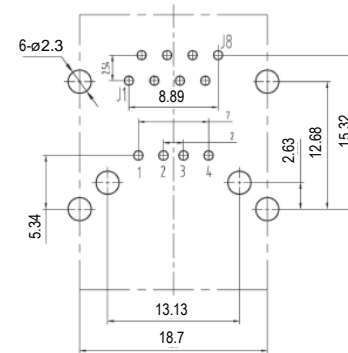

Recommended PCB Layout

Series	Positions	Contacts	Body Style	USB Version	Contacts	Mod jack Plating	USB Plating
CTJUSBA	X	XX	611SA	1F4RT	X	XX	XX
Modular jack/ USB A combo	4-10	02-10	See drawing	Single port female, 4 contacts right angle through hole mount	B=Brass P=Phos Bronze	SX=Duplex X=6, 15, 30 50µ"	SX=Duplex X=6, 15 30 50µ"

RoHS Compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/05/08
				Checked	Lizzy	08/05/08
				Drawn	Tina	08/05/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJUSBA-8-08-SA611S-1F4RT-PS0S0**

Description: RJ45 USB=A combination, right angle through hole