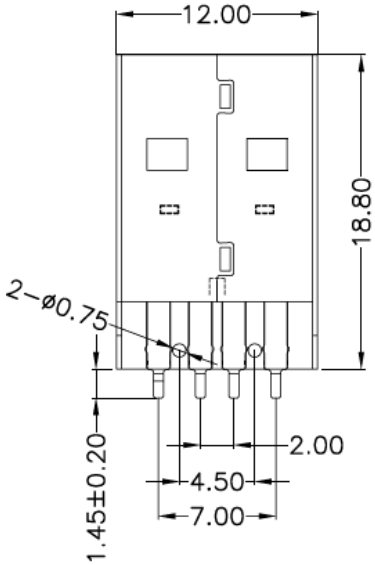

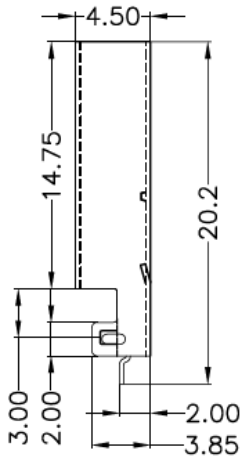

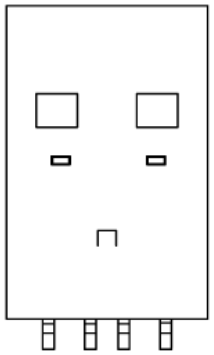

SPECIFICATIONS

Current Rating:	1.5A max
Contacts:	Brass, Gold Plated
Contact Res:	30 milliohms max
Housing:	LCP or PBT
Shell:	Steel
Insulation Res:	1000 Megohms min/500VDC
Withstanding:	500VAC
Operating Temp:	-25°C to +85°C



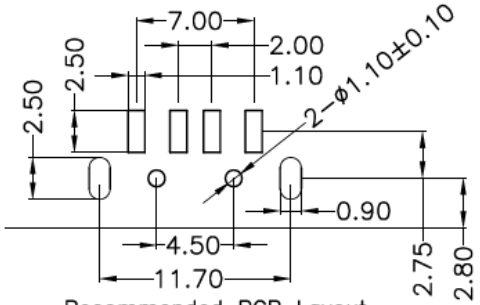

Recommended PCB Layout

Series	Type	Style	Version	Housing	Shell	Shell Plating	Contacts	Contact Plating	Color
CUSB	A	CS22ADH	1M4RST	X	S	X	B	SG	WT
USB Connector	Type A	See Drawing	Single Port Male 4 Contacts, Side Entry SMT+ThHl	L=LCP P=PBT	S=Steel	N=Nickel (std) G=Gold	B=Brass	SG=Selective Gold	WT=White

RoHS Compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	11/10/16
				Checked	Lizzy	11/10/16
				Drawn	Tina	11/10/16
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-A-CS22ADH-1M4RST-XSNBSG-XX**

Description: USB type A, male, shielded, SMT