
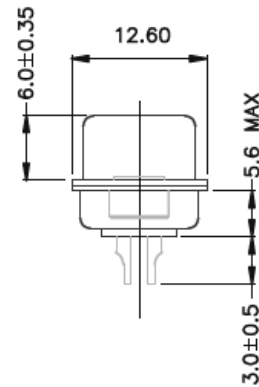


SPECIFICATIONS

Current rating: 5A
 Contact plating: See chart
 Contact resistance: 15 mΩ max
 Insulation resistance: 1000 MΩ min
 Shell plating: See chart
 Withstanding: 500 VAC/1-min
 Operating Temp: -55°C to +105°C

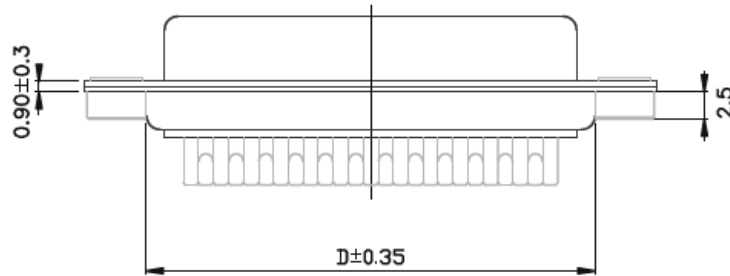

Dimensions (mm)				
Pins	A	B	C	D
9	30.80	24.99	16.92	19.20
15	39.15	33.32	25.25	27.70
25	53.00	47.04	38.96	41.10
37	69.30	63.50	55.42	57.30

Series	Gender	Mounting Options	Shell Plating	Contact Plating	Insulator Color
DSXX	XC	XXX	XX	XX	XX
D-sub connector XX=Pins 09, 15, 25, 37	MC=Male FC=Female	[blank]=.120" through holes RCN=Riveted clinch nuts #4-40 RJS=Riveted jackscrews #4-40	N=Nickel (std) TN=Tin	GD=Gold (std) SG=Selective gold	BK=Black (std) BL=Blue WT=White

RoHS Compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	01/10/17
				Checked	Lizzy	01/10/17
				Drawn	Tina	01/10/17
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXX-MC-RCN-XX-XX-XX**

Description: D-Subminiature solder type, stamped pin, male plug