
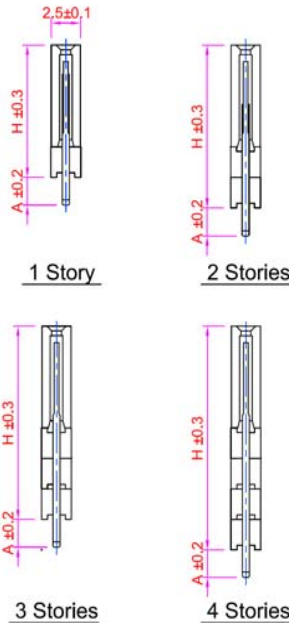


**Recommended
P.C. Board Hole Layout**

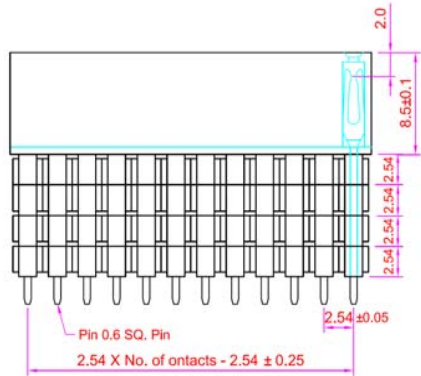

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 20m ohms max.
 Withstanding: AC 600V
 Contact Material: Brass
 Insulator Material: Polyester, UL94V-0 PBT
 Contact Plating: Gold Flash (std)
 Operating Temp: -40C ~ +105C

Profile & Tail		
Code	H	A
1W	11.04	2.30
1Y	11.04	7.38
1Z	11.04	12.20
2Y	13.58	4.84
2Z	13.58	9.65
3Y	16.12	2.30
3W	16.12	3.50
3Z	16.12	7.10
4Z	18.66	4.60

Series	Rows	Positions	Polarization	Plating	Profile (H) / Tail (A)	Options
EARS	XX	XX	X	XX	XX	XX
Elevated receptacle strip	01=1 row 02=2 rows	02-40 1 row 04-80 2 rows	[blank]=none P=Polarized	TN=Tin GDXX=Gold XX=Flash if blank, 10, 15, 30u"	See Table For Code	[blank]=none HT=High Temp

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **EARS-01-XX-X-XX-XX-XX**

Description: Elevated receptacle strip