



SPECIFICATIONS

Voltage rating: 250VAC
 Current rating: See chart
 Contacts: Brass, tin plated
 Contact resistance: 10 milliohms max.
 Body material: Nylon, UL94V-0, black
 Insulation resistance: 100 megohms min.
 Withstanding: 1,500 VAC for 1 min.
 Temperature rise: 30°C max.
 Temperature Range: -40°C to +105°C

Surface Mount
Available

Dimensions		
Pos.	A	B
2		6.0
4	3.0	9.0
6	6.0	12.0
8	9.0	15.0
10	12.0	18.0
12	15.0	21.0
14	18.0	24.0
16	21.0	27.0
18	24.0	30.0
20	27.0	33.0
22	30.0	36.0
24	33.0	39.0

Current rating	
AWG	Amps
20	5
22	5
24	4
26	3
28	2
30	1

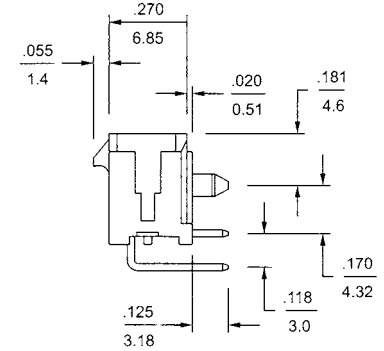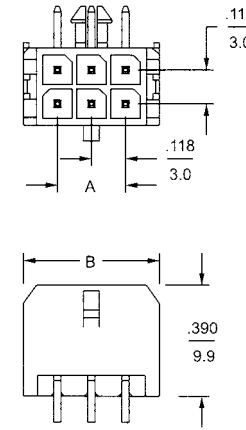


2 circuit

4 circuit

6 circuit

8 ~ 24 circuit

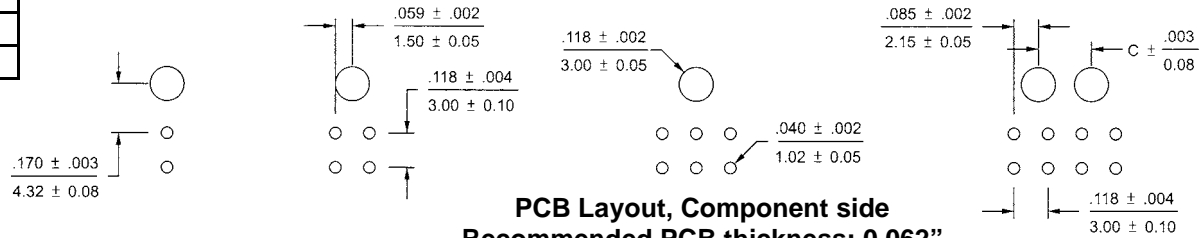

PCB Layout, Component side
Recommended PCB thickness: 0.062"

Series	Type	Positions	Plating
JS-A	3046	XX	xx
Pluggable Connector	3046 series .118" (3.0mm) wire-to-board header	2-24	[Blank]=Tin (std) GDXX=Gold XX: 10, 15, 30"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	O/T Increase	4/25/16	Jeff	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-3046-XX-XX**

Description: Header, .118" (3.0mm) pitch, dual row, right angle