
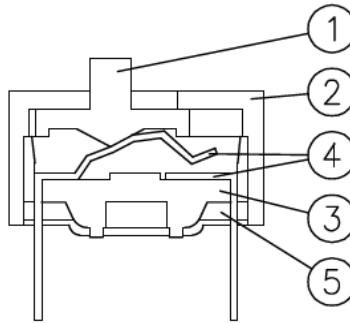


SPECIFICATIONS

Non-switching Rating: 100mA 50VDC
 Switching Rating: 25mA, 24VDC
 Contact Resistance: 100mΩ max
 Capacitance: pF max
 Insulation Resist: 100MΩ 500VDC min
 Withstanding: 500VDC/1-min

Durability Elect: 2000 cycles each swt
 Durability Mech: 2000 cycles each swt
 Operating Force: 800gf max
 Stroke: 2.0mm
 Operating Temp: -40°C to +85°C
 Storage Temp: -25°C to +85°C
 Processing Temp: 260°C/5-sec

Dimensions mm(In)		
Pos	A	B
03	8.92(0.351)	5.08(.200)
04	11.16(0.439)	7.62(.300)
05	13.70(0.539)	10.16(.400)
06	16.24(0.639)	12.70(0.500)
07	19.08(0.751)	15.24(0.600)
08	21.32(0.839)	17.78(0.700)
09	24.16(0.951)	20.32(0.800)
10	26.40(1.039)	22.86(0.900)
12	31.48(1.239)	27.94(1.100)

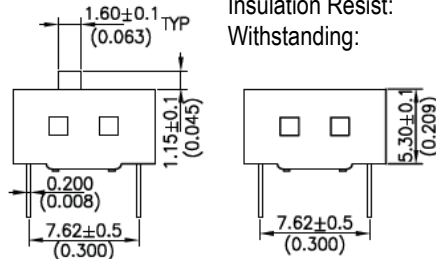

Item	Name	Material	Finish
1	Actuator	PBT UL 94V-0	White
2	Cover	PBT UL 94V-0	Blue, Black or Red
3	Base	PBT UL 94V-0	Black
4	Terminal	Phos Bronze	Gold
5	Potting	Epoxy	Black

Series	Type	Positions	Contact Plating	Actuator	Seal	Color	Packed
SWD-A	DWRS	XX	GD	X	X	XX	TB
Dip Switch .100" Pitch	Slide Type (see drawing)	03-12	Gold	[Blank]=Raised R=Recessed	[Blank]=Std T=Top Tape	RD=Red BL=Blue BK=Black	Tube

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/11/10
				Checked	Lizzy	03/11/10
				Drawn	Tina	03/11/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **SWD-A-DWRS-XX-GD-X-X-XX-TB**

Description: Slide Type DIP Switch