

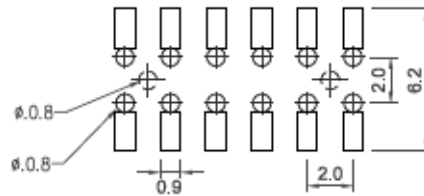
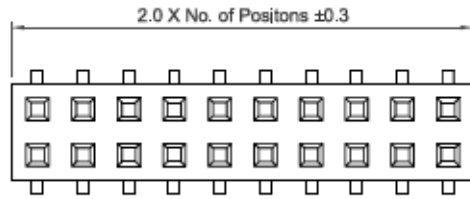


**Recommended
P.C. Board SMD Layout**



SPECIFICATIONS

Current Rating: 2Amp
 Contact Material: Phosphor Bronze
 Contact Plating: See Table
 Contact Resistance: 20mΩ Max.
 Insulator Material: Polyester, UL94V-0 Nylon 9T (std)
 Insulator Resistance: 1000 Megohms min.
 Withstanding: 500 VAC
 Operating Temp: -40°C to +125°C

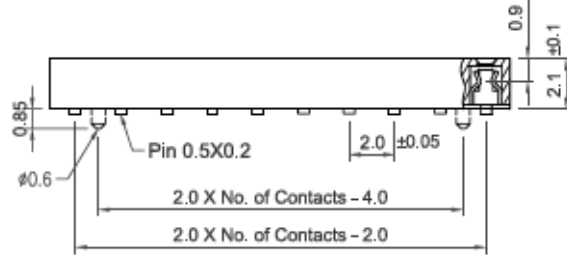

Series	Rows	Profile	Positions	Plating	Surface mount	Packaging
BRS	02	LPA	XX	XX	SMXX	XX
2mm Receptacle	02=Dual row	LPA=2.1mm	6-60	TN=Tin SGXX=Selective Gold GDXX=Gold XX: Flash if Blank, 10, 15, 30μ"	SM=Surface Mount SMCP=Surface Mount with Locating Peg	T=Tube M=Metal Cap R=Reel P=Plastic Cap F=Film

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	11/23/15
				Checked	Lizzy	11/23/15
				Drawn	Tina	11/23/15
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-02-LPA-XX-XX-SMXX-XX**

Description: Female Header Dual Rows SMT Type