
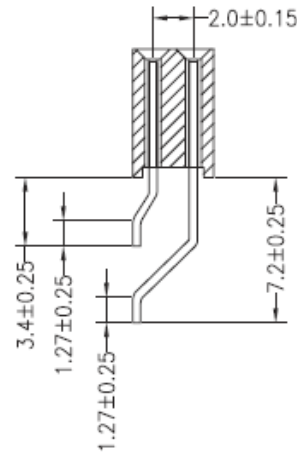
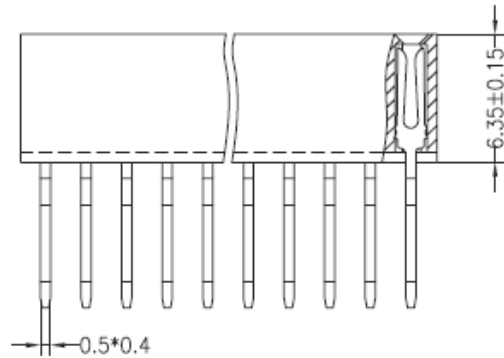


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



SPECIFICATIONS

Rated Current: 1.5Amp
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Contact Material: Brass
 Contact Plating: Au or Sn over Ni
 Insulation Material: Polyester UL94V-0
 Standarg: PA6T
 Max Processing: 240C for 30-60 seconds
 260C for 10 seconds
 Operating Temp: -40C to +105C

Series	Rows	Profile	Contacts	Plating	Options
BRS	0XF	XX	XX	XX	XX
2mm Receptacle strip	1=Single 2=Dual 3=R/A single row 4=R/A dual row	HP=6.35	Single row 1-40 Dual row 2-80	TN=Tin GDXX=Gold XX=flash if blank, 15, 30, 50u"	[blank]=None SM=Surface mount

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/18/12
				Checked	Lizzy	04/18/12
				Drawn	Tina	04/18/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-03F-HP-XX-XX-SM**
 Description: Receptacle strip, double row, .079" (2.00mm) pitch, top entry, Right Angle Surface Mount