


SPECIFICATIONS

Current Rating: 1.5A
 Voltage Rating: 30 VRMS
 Housing: PBT+30% GF
 Insulation Res: 1000 Megohms min
 Contacts: Phos Bronze
 Contact Res: 30milliohm max
 Shell: Brass Nickel Plated
 Withstanding: 500VAC
 Mate Force: 35N max
 Extract Force: 10N min

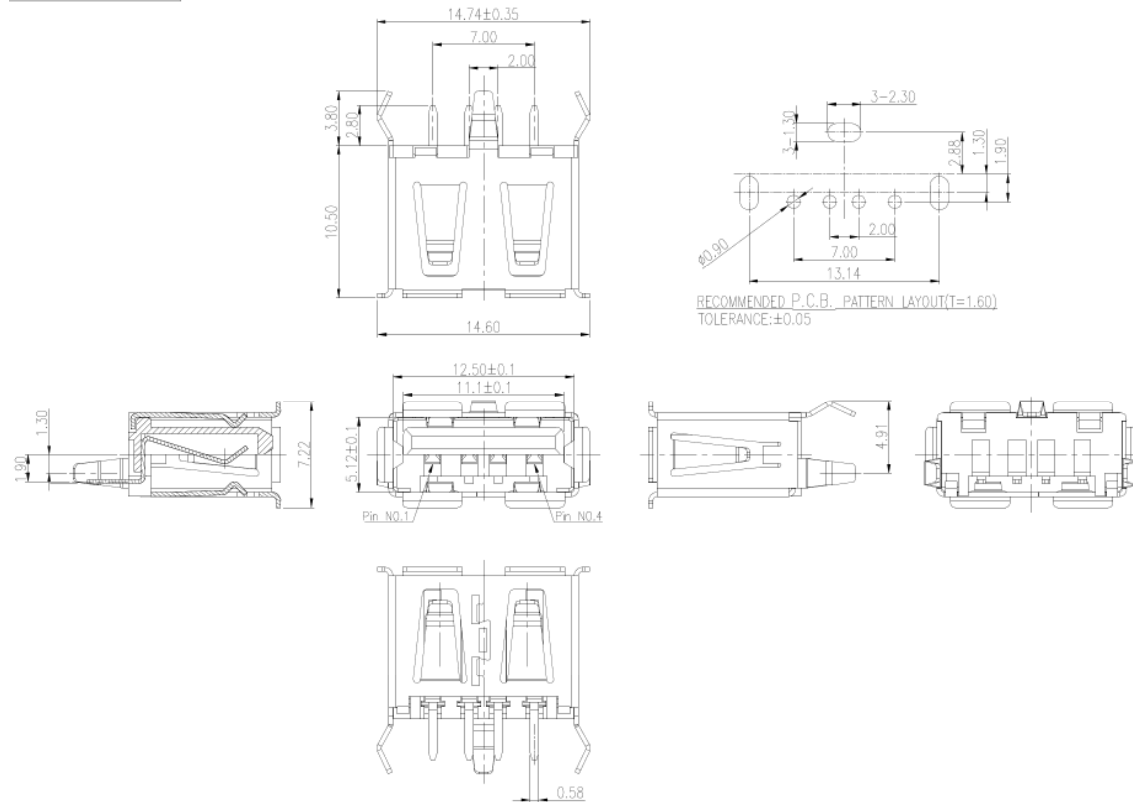

| Series | Type | Style | Version | Housing | Shell | Shell Plating | Contacts | Contact Plating | Color | Package |
|---------------|--------|-------------|--|---------|---------|-------------------|------------------|--|----------------------|------------------------------|
| CUSB | A | EM32 | 1F4VT | P | B | N | P | GDXX | XX | XX |
| USB Connector | Type A | See Drawing | Single Port Female 4 Contacts, Vertical Through Hole | P=PBT | B-Brass | N=Nickel (std) | P=Phos Bronze | GDXX=Gold XX=Flash if blank, 3, 5, 10, 15, 30μ" | BK=Black WT=White | TY=Tray TR=Tape & Reel |

RoHS Compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| | | | | Approved | Howard | 07/11/14 |
| | | | | Checked | Lizzy | 07/11/14 |
| | | | | Drawn | Tina | 07/11/14 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | UNIT: mm | | |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-A-EM32-1F4VT-P-BN-PGDXX-XX**

Description: USB type A female shielded through hole plus SMT mounting