
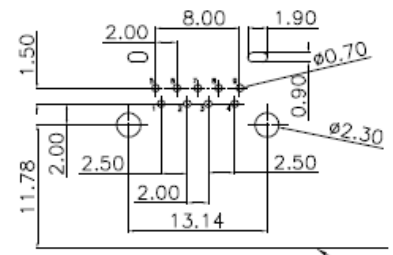






SPECIFICATIONS

Housing: PBT, UL94V-0
 Terminal: Copper Alloy, Gold Plating
 Shell: C2680 or SUS304, Nickel Plated



RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05

PCB EDGE



RoHS compliant

Series	Type	Style	Contact Plating
CUSB	A31	203A	GDXX
USB Connector	Type A, 3.1	203A Style 9pin 90° DIP	GDXX=Selective Gold XX=Flash if blank, 10,15,30u" Gold

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	9/02/14
				Checked	Lizzy	9/02/14
				Drawn	Tina	9/02/14
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-A31-203A-GDXX**

Description: USB 3.1 A Type, Female, 9 Pin DIP 90°