




SHIELDED

Flange (Ears)
Optional

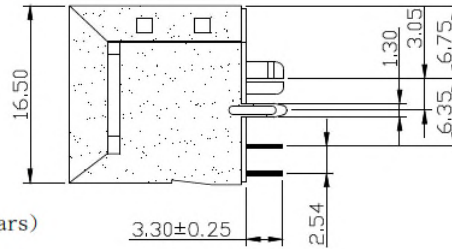

SPECIFICATIONS

Contact material: Phosphor bronze 0.35mm
 Contact plating: Gold in contact area
 Gold flash in solder tail area
 Housing material: PBT polyester, mixed glass fiber, UL94V-0, black
 Shield material: Copper alloy 0.25mm
 Shield plating: Nickel

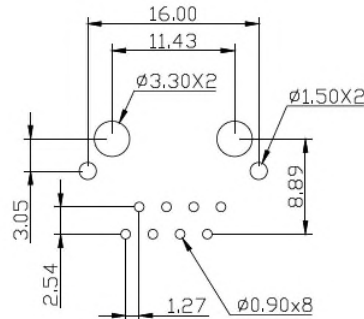

PC Board Layout

Series	Positions	Contacts	Body	Color	Plating	Options
CTJ	8	08	260	BK	PX	XX
Modular phone jack	8=8 positions	08=8 contacts	260 body, vertical entry	BK=Black	P0=6 μ " gold P1=15 μ " gold P2=30 μ " gold P3=50 μ " gold	FS=Full shield WF=Without flange KY=With key way

RoHS Compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/14/13
				Checked	Lizzy	08/14/13
				Drawn	Tina	08/14/13
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-260-BK-PX-FS**

Description: Modular jack, 8P8C, shielded, top entry, with flange