


SPECIFICATIONS

Current rating: 2 amps
 Contact material: Brass
 Contact resistance: 30 milliohms max. at 100 milliamps DC
 Housing material: 30% glass filled PBT, UL94V-0
 Coaxial or power: Copper alloy
 Insulation resistance: 1,000 megohms min. at 500VDC
 Withstanding: 1,000VAC for 1 min.
 Operating temperature: -55°C to +105°C

- All mounting types available with boardlocks (BL)
- Straight (A mount) type available in press fit (PF)
- All types available with first mate last break (FMLB)

A	(2.54 x no. of contacts) - 2.54
B	(7.62 x no. of contacts) / 2 - 7.62

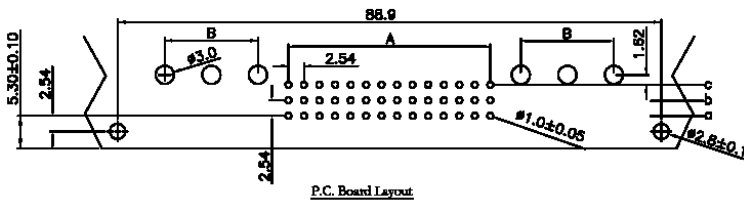

Connections		
Power/Coax	2 Rows	3 Rows
2	52	78
4	40	60
6	28	42
8	16	24
10	4	6

Series	Gender	Mounting	Positions	Pin Length	Pitch	Loaded Rows	Plating	Type	Options
CED	X	X	XX	XX	XX	X	SGX	M	XX
DIN41612	1-B=Male right angle 2-A=Female straight		02=2 power/coax 04=4 power/coax 06=6 power/coax 08=8 power/coax 10=10 power/coax	A1=2.9mm	B1=2.54mm	5=A, C 7=A, B, C	SG=Selective gold 1=30µ" (Level 1) 2=10-20µ" (Level 2) 3=Flash (Level 3)	M type (See also C, B, R, Q)	[Blank]=None PF=Press fit BL=Boardlocks HT=High temp. material

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CED-1-B-XX-A1-B1-X-SGX-M**

Description: DIN 41612, M type, male