
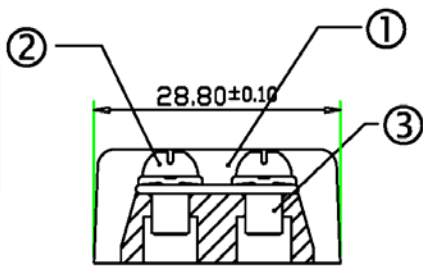
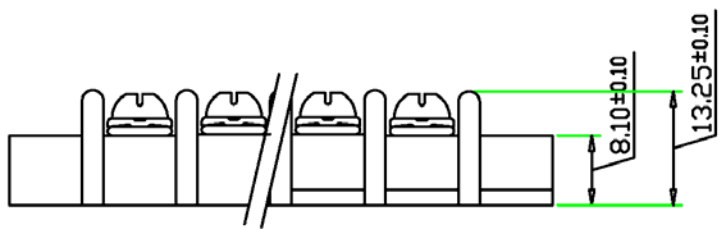


SPECIFICATIONS

Current Rating: 20 Amps @ AC250V
 Housing Material: Phenolic, Black
 Insulation Resistance: 1000Ω min at DC 500V
 Screw Material: M4.0 Nickel Plated Steel
 Terminals: Tin Plated Brass
 Screw Torque: 12 In-Lb
 Wire Range: 12~18 WG
 Withstanding: AC 2000V min
 Operating Temp: -40°C ~ +160°C

Dimensions		
Poles	A	B
2	36.35	28.50
3	45.85	38.00
4	55.35	47.50
5	64.85	57.00
6	74.35	66.50
7	83.85	76.00
8	93.35	85.50
9	102.85	95.00
10	112.35	104.50
11	121.85	114.00
12	131.35	123.50
13	140.85	133.00
14	150.35	142.50
15	159.85	152.00
16	169.35	161.50
17	178.85	171.00
18	188.35	180.50
19	197.85	190.00
20	207.35	199.50
21	216.85	209.00
22	226.35	218.50
23	235.85	228.00
24	245.35	237.50
25	254.85	247.00
26	264.35	256.50

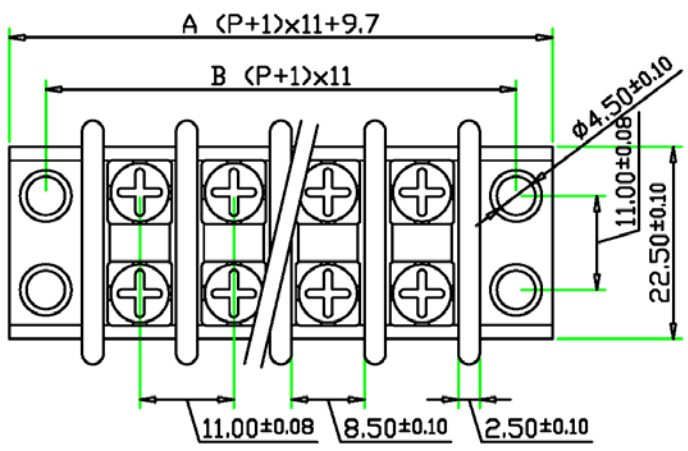

Series	Type	Pitch	Poles	Color
CMTB	HD10AFX	1100	XX	BK
Terminal block	X= [blank]=No Cover C=With Cover	1100=11.00mm pitch	02-26 poles	BK=Black

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-HD20AFX-1100-XX-BK**

Description: Double Row Terminal Block