

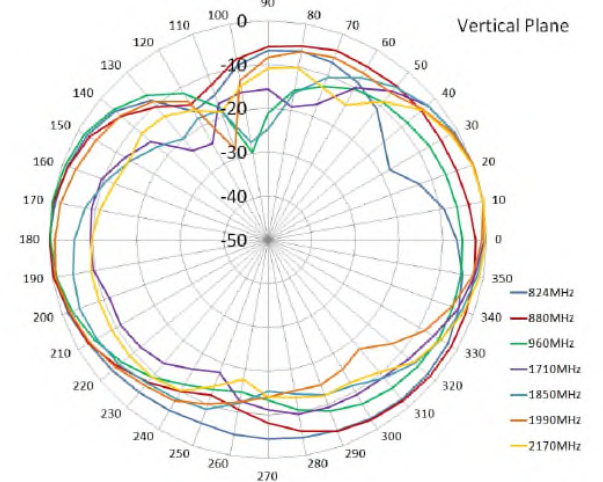
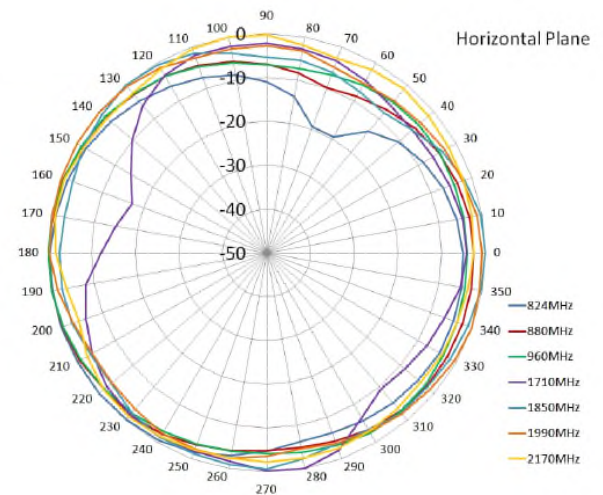


RoHS Compliant

Rev.	Description	Date	Approved	Drawing	Name	Date	 Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919 Part No.: ANT-GSMUMTS-3126 Description: Quad band GSM/UMTS antenna with RG174 and SMA connector
				Drawn	Tina	02/11/16	
				Checked	Lizzy	02/11/16	
				Approved	Howard	002/11/16	
				0.0 ± 0.35	0.00 ± 0.20	Angles $\pm 3^\circ$	
				 Unit: mm			

Item	Specifications	
Antenna	Frequency Range	824~960/1710~2170MHz
	Polarization	Linear
	Gain	2.5dBi (Zenith)
	V.S.W.R	<2.0
	Impedance	50 Ω
Mechanical	PCB Dimension	115*9*0.8mm
	Cable	RG174
	Connector	SMA or others
	Radome Material	EVA
Environmental	Mounting Method	Adhesive
	Operating Temperature	-40°C~+85°C
	Relative Humidity	Up to 95%
	Ingress Protection	IP67
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant



RoHS Compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Drawn	Tina	02/11/16
				Checked	Lizzy	02/11/16
				Approved	Howard	002/11/16
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				Unit: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ANT-GSMUMTS-3126**

Description: Quad band GSM/UMTS antenna with RG174 and SMA connector

