


SPECIFICATIONS

Current Rating: See Chart
 Voltage Rating: 600V RMS
 Insulation Resistance: 1000MΩ/500VDC min.
 Withstanding: 1500V AC/1-minute
 Operating Temp: -40°C ~ +105°C

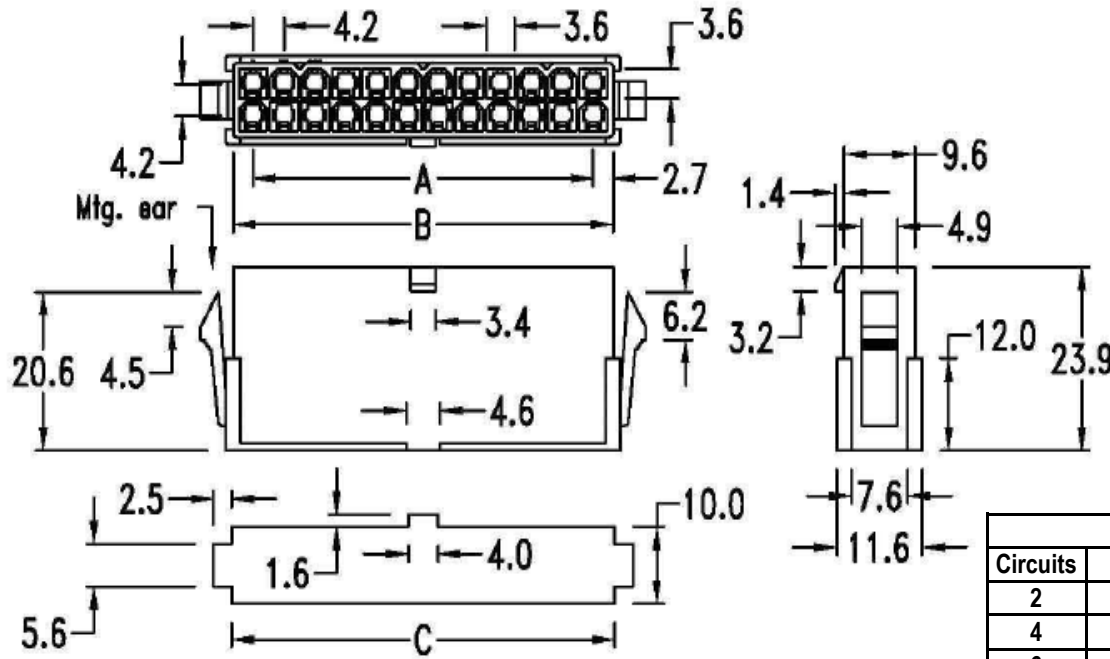

Current Rating (A)				
Circuits	2	4,6	8,10	12-24
#18	9	8	7	6
#20	7	6	5	5
#22	5	4	4	4
#24	4	3	3	3

Dimensions (mm)							
Circuits	A	B	C	Circuits	A	B	C
2		5.4	5.8	14	25.2	30.6	31.0
4	4.2	9.6	10.0	16	29.4	34.8	35.2
6	8.4	13.8	14.2	18	33.6	39.0	39.4
8	12.6	18.0	18.4	20	37.8	43.2	43.6
10	16.8	22.2	22.6	22	42.0	47.4	47.8
12	21.0	26.4	26.8	24	46.2	51.6	52.0

Series	Type	Positions	Options
JS-A	9358	XX	XX
Connectors	High Current High Density Housing	02-24	E=Mounting Ears Blank=No Ears

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/24/05
				Checked	Lizzy	03/24/05
				Drawn	Tina	03/24/05
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		


Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-9358-XX-E**


Description: 165" (4.2mm) Receptacle Housing

	1	2	3	4	5	6	7	8	9
A									
B		2 Circuits		8 Circuits			14 Circuits		
C									
D		4 Circuits		10 Circuits			16 Circuits		
E									
F		6 Circuits		12 Circuits			18 Circuits		
		RoHS compliant							
							Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919		
							Part No.: JS-A-9358-XX-E		
							Description: 165" (4.2mm) Receptacle Housing		
G									
	1	2	3	4	5	6	7	8	9


0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'
 UNIT: mm

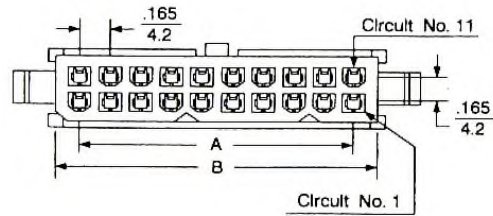


20 Circuits

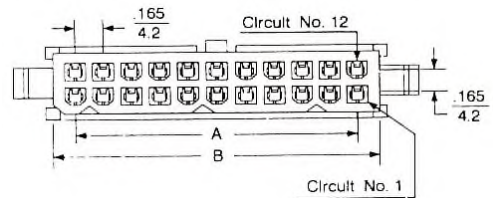


22 Circuits

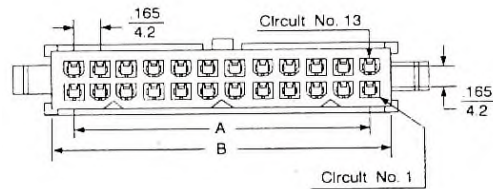

24 Circuits

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/24/05
				Checked	Lizzy	03/24/05
				Drawn	Tina	03/24/05
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	



Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-9358-XX-E**

Description: 165" (4.2mm) Receptacle Housing

1

2

3

4

5

6

7

8

9